

SHENZHEN TIBTRONIX TECHNOLOGY CO., LTD.



# TSPLXG10D-xx

---

**10Gb/s 10km CWDM SFP+ Transceiver**  
**Hot Pluggable, Duplex LC, +3.3V, 1270~1610nm, CWDM DFB, Single mode**

2013/6/1



Shenzhen Tibtronix Technology Co., Ltd.

3/F, 12th Building, Nangang 1st Industrial Park, Baimang Xili, Songbai Road, Nanshan District, Shenzhen, China

Tel: +86 755 23316583

Fax: +86 755 29810056

E-mail: [sales@tibtronix.com](mailto:sales@tibtronix.com)

<http://www.tibtronix.com>

## Features:

- ✧ Supports 9.95 to 11.3Gb/s bit rates
- ✧ Hot-Pluggable
- ✧ Duplex LC connector
- ✧ 1270~1610nm CWDM DFB transmitter, PIN photo-detector
- ✧ SMF links up to 10km
- ✧ 2-wire interface for management specifications compliant with SFF 8472 digital diagnostic monitoring interface
- ✧ Power Supply :+3.3V
- ✧ Power consumption<1.5W
- ✧ Temperature Range: 0~ 70°C
- ✧ RoHS compliant

## Applications:

- ✧ 10GBASE-LR/LW Ethernet
- ✧ Sonet OC-192/SDH
- ✧ 10G Fibre Channel 1200-SM-LL-L

## Description:

TIBTRONIX's TSPLXG10D-xx is a very compact 10Gb/s optical transceiver module for serial optical communication applications at 10Gb/s. The TSPLXG10D-xx converts a 10Gb/s serial electrical data stream to 10Gb/s optical output signal and a 10Gb/s optical input signal to 10Gb/s serial electrical data streams. The high speed 10Gb/s electrical interface is fully compliant with SFI specification.

The high performance 1270 ~ 1610nm CWDM DFB transmitter and high sensitivity PIN receiver provide superior performance for Ethernet applications at up to 10km links.

The SFP+ Module compliants with SFF-8431, SFF-8432 and IEEE 802.3ae 10GBASE-LR. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472.

The fully SFP compliant form factor provides hot pluggability, easy optical port upgrades and low

EMI emission.

## ● Absolute Maximum Ratings

| Parameter                  | Symbol   | Min. | Typical | Max. | Unit |
|----------------------------|----------|------|---------|------|------|
| Storage Temperature        | $T_S$    | -40  |         | +85  | °C   |
| Case Operating Temperature | $T_A$    | 0    |         | 70   | °C   |
| Maximum Supply Voltage     | $V_{CC}$ | -0.5 |         | 4    | V    |
| Relative Humidity          | RH       | 0    |         | 85   | %    |

## ● Electrical Characteristics ( $T_{OP} = 0$ to $70$ °C, $V_{CC} = 3.135$ to $3.465$ Volts)

| Parameter   | Symbol           | Min.  | Typical | Max.           | Unit     | Note |
|---|------------------|-------|---------|----------------|----------|------|
| Supply Voltage  | $V_{CC}$         | 3.135 |         | 3.465          | V        |      |
| Supply Current  | $I_{CC}$         |       |         | 360            | mA       |      |
| Power Consumption                                     | $P$              |       |         | 1.5            | W        |      |
| <b>Transmitter Section:</b>                           |                  |       |         |                |          |      |
| Input differential impedance                          | $R_{in}$         |       | 100     |                | $\Omega$ | 1    |
| Tx Input Single Ended DC Voltage Tolerance (Ref VeeT) | $V$              | -0.3  |         | 4              | V        |      |
| Differential input voltage swing                      | $V_{in,pp}$      | 180   |         | 700            | mV       | 2    |
| Transmit Disable Voltage                              | $V_D$            | 2     |         | $V_{CC}$       | V        | 3    |
| Transmit Enable Voltage                               | $V_{EN}$         | Vee   |         | Vee+0.8        | V        |      |
| <b>Receiver Section:</b>                              |                  |       |         |                |          |      |
| Single Ended Output Voltage Tolerance                 | $V$              | -0.3  |         | 4              | V        |      |
| Rx Output Diff Voltage                                | $V_o$            | 300   |         | 850            | mV       |      |
| Rx Output Rise and Fall Time                          | $T_r/T_f$        | 30    |         |                | ps       | 4    |
| LOS Fault   | $V_{LOS\ fault}$ | 2     |         | $V_{CC\ HOST}$ | V        | 5    |
| LOS Normal  | $V_{LOS\ norm}$  | Vee   |         | Vee+0.8        | V        | 5    |

Note:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Per SFF-8431 Rev 3.0
3. Into 100 ohms differential termination.
4. 20%~80%
5. LOS is an open collector output. Should be pulled up with 4.7k – 10k $\Omega$  on the host board. Normal operation is logic 0; loss of signal is logic 1. Maximum pull-up voltage is 5.5V.

## ● Optical Parameters(TOP = 0 to 70°C, VCC = 3.135 to 3.465 Volts)

| Parameter                      | Symbol            | Min.          | Typical | Max.          | Unit  | Note |
|--------------------------------|-------------------|---------------|---------|---------------|-------|------|
| <b>Transmitter Section:</b>    |                   |               |         |               |       |      |
| Center Wavelength              | $\lambda_c$       | $\lambda-6.5$ |         | $\lambda+6.5$ | nm    |      |
| spectral width                 | $\Delta\lambda$   |               |         | 1             | nm    |      |
| Average Optical Power          | Pavg              | -8.2          |         | 0.5           | dBm   | 1    |
| Optical Power OMA              | Poma              | -5.2          |         |               | dBm   |      |
| Laser Off Power                | Poff              |               |         | -30           | dBm   |      |
| Extinction Ratio               | ER                | 3.5           |         |               | dB    |      |
| Transmitter Dispersion Penalty | TDP               |               |         | 3.2           | dB    | 2    |
| Relative Intensity Noise       | Rin               |               |         | -128          | dB/Hz | 3    |
| Optical Return Loss Tolerance  |                   | 20            |         |               | dB    |      |
| <b>Receiver Section:</b>       |                   |               |         |               |       |      |
| Center Wavelength              | $\lambda_r$       | 1260          |         | 1610          | nm    |      |
| Receiver Sensitivity           | Sen               |               |         | -14.5         | dBm   | 4    |
| Stressed Sensitivity (OMA)     | Sen <sub>ST</sub> |               |         | -10.3         | dBm   | 4    |
| Los Assert                     | LOS <sub>A</sub>  | -25           |         | -             | dBm   |      |
| Los Dessert                    | LOS <sub>D</sub>  |               |         | -15           | dBm   |      |
| Los Hysteresis                 | LOS <sub>H</sub>  | 0.5           |         |               | dB    |      |
| Overload                       | Sat               | 0             |         |               | dBm   | 5    |
| Receiver Reflectance           | Rrx               |               |         | -12           | dB    |      |

Note:

1. Average power figures are informative only, per IEEE802.3ae.
2. TWDP figure requires the host board to be SFF-8431 compliant. TWDP is calculated using the Matlab code provided in clause 68.6.6.2 of IEEE802.3ae.
3. 12dB reflection.
4. Conditions of stressed receiver tests per IEEE802.3ae. CSRS testing requires the host board to be SFF-8431 compliant.
5. Receiver overload specified in OMA and under the worst comprehensive stressed condition.


## ● Timing Characteristics

| Parameter                                    | Symbol             | Min. | Typical | Max. | Unit |
|--|--------------------|------|---------|------|------|
| TX_Disable Assert Time                       | t <sub>off</sub>   |      |         | 10   | us   |
| TX_Disable Negate Time                       | t <sub>on</sub>    |      |         | 1    | ms   |
| Time to Initialize Include Reset of TX_FAULT | t <sub>int</sub>   |      |         | 300  | ms   |
| TX_FAULT from Fault to Assertion             | t <sub>fault</sub> |      |         | 100  | us   |
| TX_Disable Time to Start Reset               | t <sub>reset</sub> | 10   |         |      | us   |

|                                       |                    |  |  |     |     |
|---------------------------------------|--------------------|--|--|-----|-----|
| Receiver Loss of Signal Assert Time   | $T_{A,RX\_LOS}$    |  |  | 100 | us  |
| Receiver Loss of Signal Deassert Time | $T_{d,RX\_LOS}$    |  |  | 100 | us  |
| Rate-Select Chage Time                | $t_{ratesel}$      |  |  | 10  | us  |
| Serial ID Clock Time                  | $t_{serial-clock}$ |  |  | 100 | kHz |

## ● Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

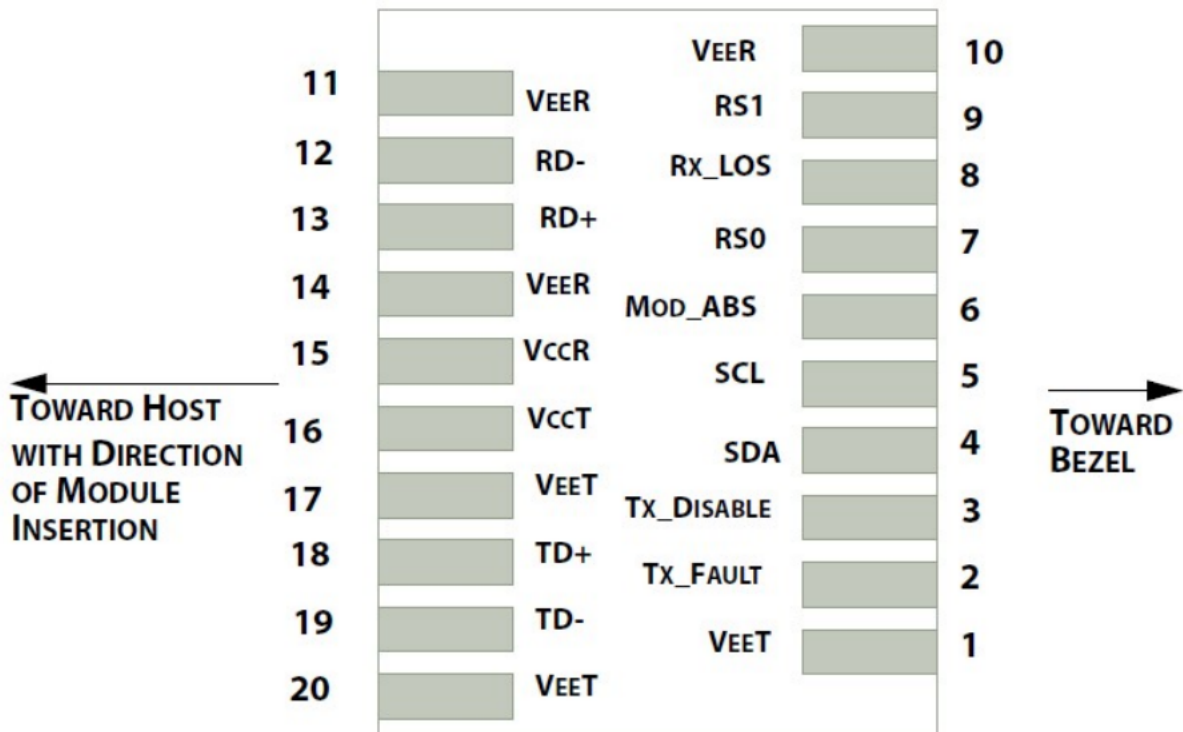

## ● Pin Function Definitions

| PIN # | Name       | Function  | Notes |
|-------|------------|---|-------|
| 1     | VeeT       | Module transmitter ground   | 1     |
| 2     | Tx Fault   | Module transmitter fault  | 2     |
| 3     | Tx Disable | Transmitter Disable; Turns off transmitter laser output   | 3     |
| 4     | SDL        | 2 wire serial interface data input/output (SDA)   |       |
| 5     | SCL        | 2 wire serial interface clock input (SCL)   |       |
| 6     | MOD-ABS    | Module Absent, connect to VeeR or VeeT in the module  | 2     |
| 7     | RS0        | Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/ s; when low, input data rate <=4.5Gb/s |       |


|    |      |   |   |
|----|------|---|---|
| 8  | LOS  | Receiver Loss of Signal Indication  | 4 |
| 9  | RS1  | Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s |   |
| 10 | VeeR | Module receiver ground  | 1 |
| 11 | VeeR | Module receiver ground  | 1 |
| 12 | RD-  | Receiver inverted data out put  |   |
| 13 | RD+  | Receiver non-inverted data out put  |   |
| 14 | VeeR | Module receiver ground  | 1 |
| 15 | VccR | Module receiver 3.3V supply   |   |
| 16 | VccT | Module transmitter 3.3V supply  |   |
| 17 | VeeT | Module transmitter ground   | 1 |
| 18 | TD+  | Transmitter inverted data out put   |   |
| 19 | TD-  | Transmitter non-inverted data out put   |   |
| 20 | VeeT | Module transmitter ground   | 1 |

Note:

- 1.The module ground pins shall be isolated from the module case.
- 2.This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host\_Vcc on the host board.
- 3.This pin shall be pulled up with 4.7K-10Kohms to VccT in the module.
- 4.This pin is an open collector/drain output pin and shall be pulled up with 4.7K-10Kohms to Host\_Vcc on the host board.

## ● SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP-8472. The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I<sup>2</sup>C interface at address A0h and A2h. The memory is mapped in Table 1. Detailed ID information (A0h) is listed in Table 2. And the DDM specification at address A2h. For more details of the memory map and byte definitions, please refer to the SFF-8472, “Digital Diagnostic Monitoring Interface for Optical Transceivers”. The DDM parameters have been internally calibrated.

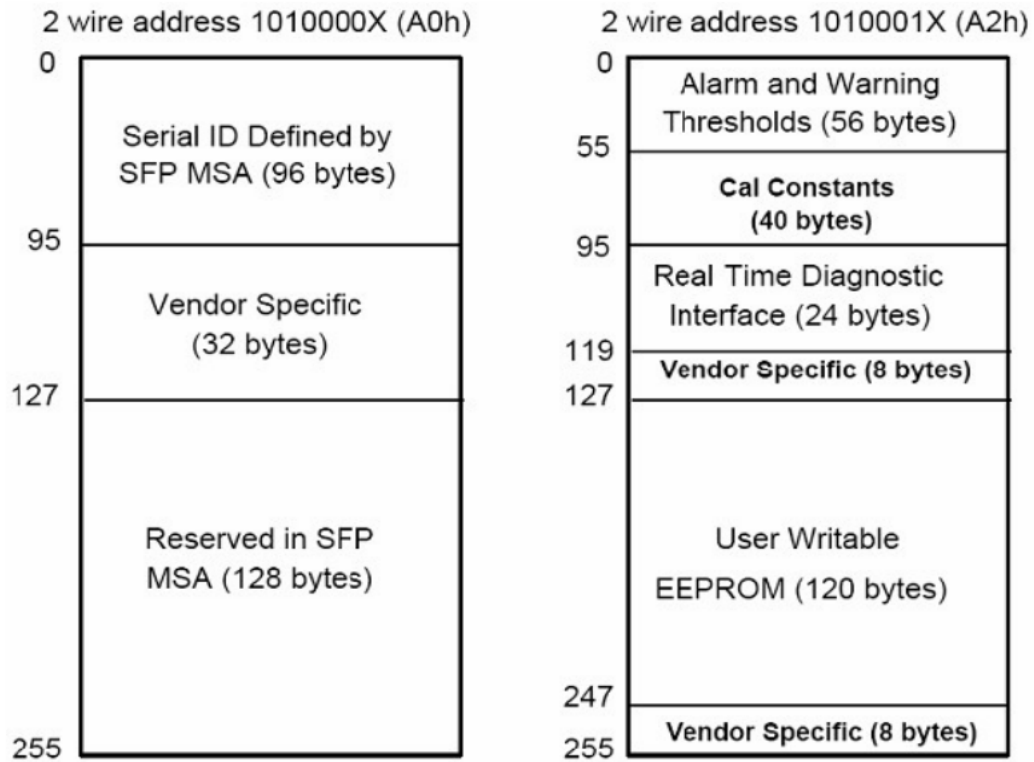**Table 1.** Digital Diagnostic Memory Map (Specific Data Field Descriptions)**Table 2 - EEPROM Serial ID Memory Contents (A0h)**

| Data Address   | Length (Byte) | Name of Length | Description and Contents                                 |
|----------------|---------------|----------------|--|
| Base ID Fields |               |                |  |
| 0              | 1             | Identifier     | Type of Serial transceiver (03h=SFP)                     |
| 1              | 1             | Reserved       | Extended identifier of type serial transceiver (04h)     |
| 2              | 1             | Connector      | Code of optical connector type (07=LC)                   |
| 3-10           | 8             | Transceiver    | 10G Base-LR  |
| 11             | 1             | Encoding       | 64B/66B  |
| 12             | 1             | BR, Nominal    | Nominal baud rate, unit of 100Mbps                       |
| 13-14          | 2             | Reserved       | (0000h)  |
| 15             | 1             | Length(9um)    | Link length supported for 9/125um fiber, units of 100m   |
| 16             | 1             | Length(50um)   | Link length supported for 50/125um fiber, units of 10m   |
| 17             | 1             | Length(62.5um) | Link length supported for 62.5/125um fiber, units of 10m |
| 18             | 1             | Length(Copper) | Link length supported for copper, units of meters        |
| 19             | 1             | Reserved       |  |
| 20-35          | 16            | Vendor Name    | SFP vendor name: TIBTRONIX                               |
| 36             | 1             | Reserved       |  |

|                                  |     |            |   |
|----------------------------------|-----|------------|---|
| 37-39                            | 3   | Vendor OUI | SFP transceiver vendor OUI ID   |
| 40-55                            | 16  | Vendor PN  | Part Number: "TSPLXG10D-xx" (ASCII)   |
| 56-59                            | 4   | Vendor rev | Revision level for part number  |
| 60-62                            | 3   | Reserved   |   |
| 63                               | 1   | CCID       | Least significant byte of sum of data in address 0-62   |
| <b>Extended ID Fields</b>        |     |            |   |
| 64-65                            | 2   | Option     | Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported) |
| 66                               | 1   | BR, max    | Upper bit rate margin, units of %   |
| 67                               | 1   | BR, min    | Lower bit rate margin, units of %   |
| 68-83                            | 16  | Vendor SN  | Serial number (ASCII)   |
| 84-91                            | 8   | Date code  | TIBTRONIX's Manufacturing date code   |
| 92-94                            | 3   | Reserved   |   |
| 95                               | 1   | CCEX       | Check code for the extended ID Fields (addresses 64 to 94)  |
| <b>Vendor Specific ID Fields</b> |     |            |   |
| 96-127                           | 32  | Readable   | TIBTRONIX specific data, read only  |
| 128-255                          | 128 | Reserved   | Reserved for SFF-8079   |

## ● Digital Diagnostic Monitor Characteristics

| Data Address | Parameter                        | Accuracy | Unit |
|--------------|----------------------------------|----------|------|
| 96-97        | Transceiver Internal Temperature | ±3.0     | °C   |
| 100-101      | Laser Bias Current               | ±10      | %    |
| 100-101      | Tx Output Power                  | ±3.0     | dBm  |
| 100-101      | Rx Input Power                   | ±3.0     | dBm  |
| 100-101      | VCC3 Internal Supply Voltage     | ±3.0     | %    |

## ● Regulatory Compliance


The TSPLXG10D-xx complies with international Electromagnetic Compatibility (EMC) and international safety requirements and standards (see details in Table following).

|   |  |                           |
|---|--|---------------------------|
| Electrostatic Discharge (ESD) to the Electrical Pins      | MIL-STD-883E<br>Method 3015.7                      | Class 1(>1000 V)          |
| Electrostatic Discharge (ESD) to the Duplex LC Receptacle | IEC 61000-4-2<br>GR-1089-CORE                      | Compatible with standards |
| Electromagnetic Interference (EMI)                        | FCC Part 15 Class B<br>EN55022 Class B (CISPR 22B) | Compatible with standards |




|                  |  |  |
|------------------|--|--|
|                  | VCCI Class B   |  |
| Laser Eye Safety | FDA 21CFR 1040.10 and 1040.11<br>EN60950, EN (IEC) 60825-1,2 | Compatible with Class 1 laser product. |

● Recommended Circuit

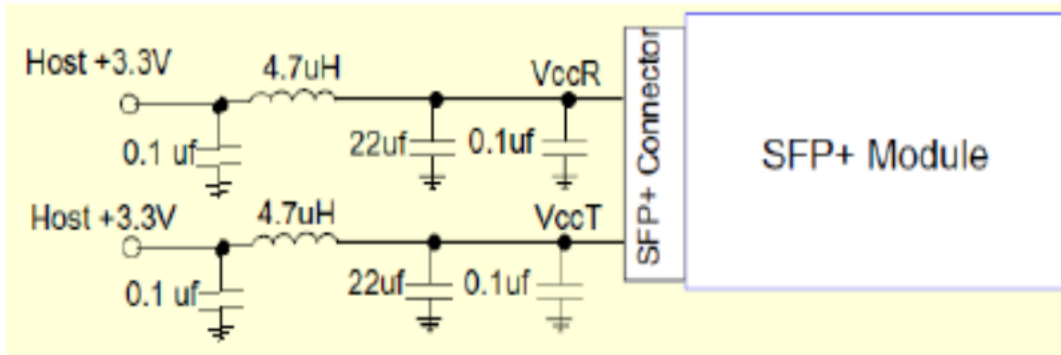


Recommended Host Board Power Supply Circuit

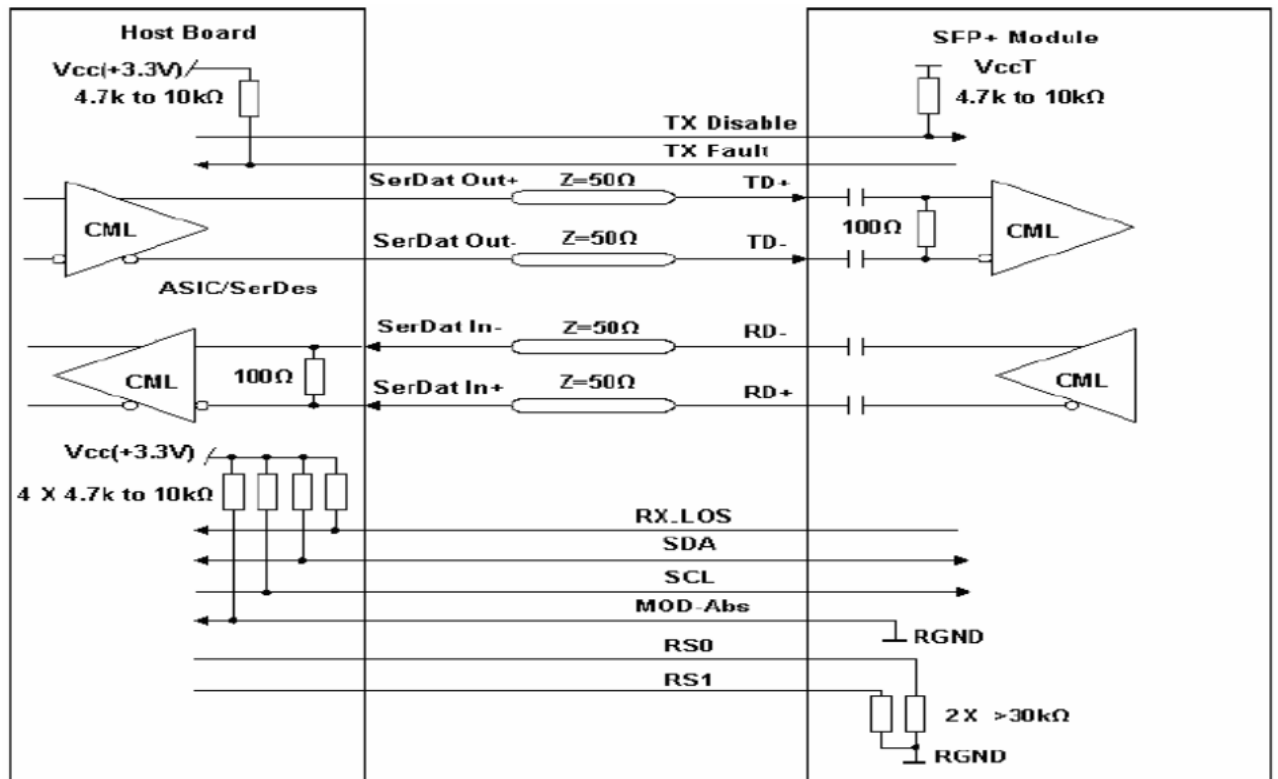

Recommended High-speed Interface Circuit

## ● Mechanical Dimensions

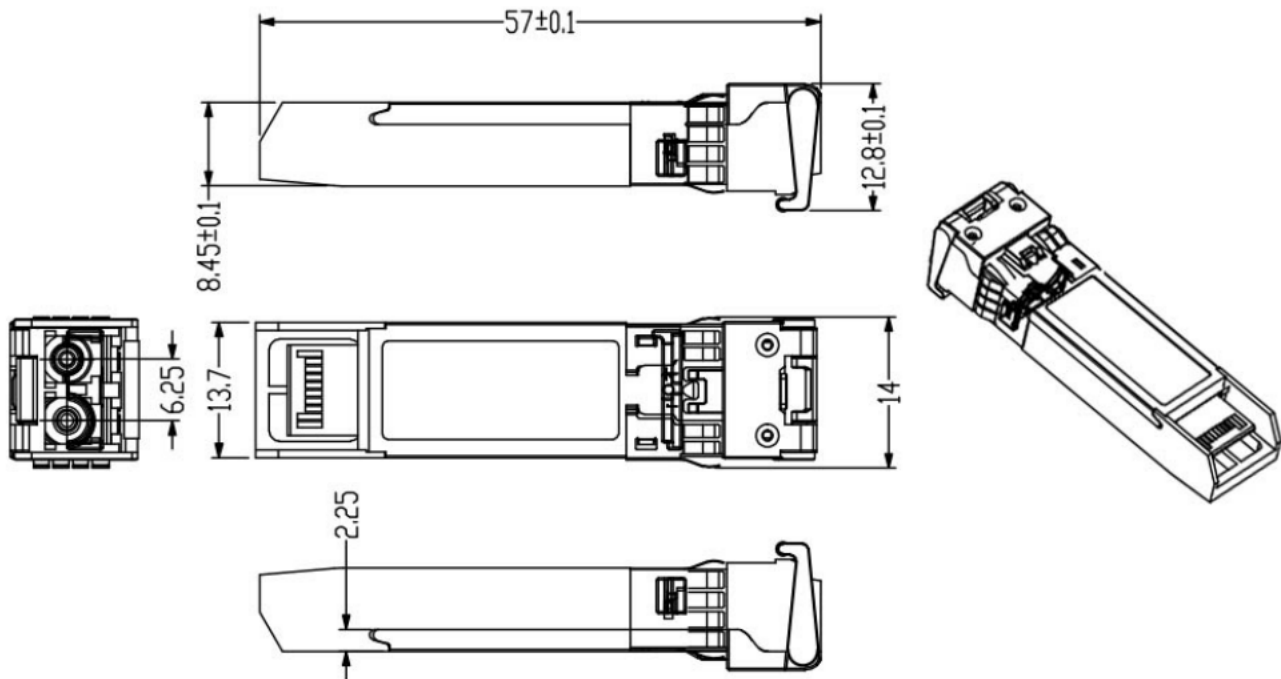

## ● Order Information:

In the Part No. of TSPLXG10D-xx, xx stands for central wavelength, such as:

27: for 1270nm, 29: for 1290nm, 31: for 1310nm, 33: for 1330nm.

TIBTRONIX reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such products or information.

Published by Shenzhen TIBTRONIX Technology Co., Ltd.

Copyright © TIBTRONIX

All Rights Reserved